



3-SMD 3528 Water proof module 74x12mm

Item Code: LED module-LBY-3F12T7412-3CWF



FOB Price: **\$0.49/pc**

Mini Order: 200 pcs

Average Rating: 1b (kg)

[Inquire Now](#)

Overview


Characteristic:

- . High brightness LED SMD as a lamp-house, having a wide angle view and petty aperture.
- . Controlled by the chips with constant current, having constant working current and indiscriminate between the cathode and anode.
- . Low voltage, safe and jar less.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Long life time, above 80000hrs.
- . Low power consumption, energy conservation and saving electricity.

Application:

This LED SMD module is used for solid lighting character, LED signs, LED lighting box, scenery designs, décor, etc.

Samples:

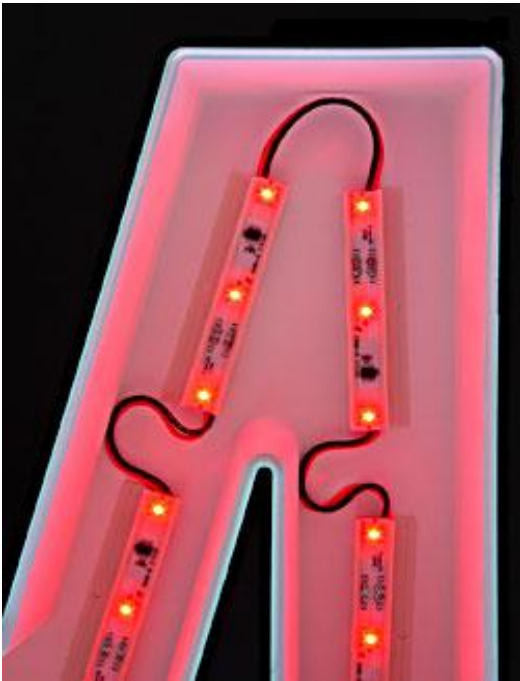

Sample 1



Sample 2

Details

Material	Plastic
LED Number	3
SMD Package Model	3528
Shape	Rectangular
Color	White
Brightness	Low

Specifications



Color	Red, yellow, blue, green, white	LED type	3528 SMD
LED Qty	3PCS	Dimension	2.9" x 0.5" x 0.2" (74 x 12 x 6mm)
Module interface	Gray0.5mm 0.1" x 3.0" (2 x 75mm) RVleads	Interface definition	Gray anode, white cathode
Cluster Qty	20pcs	Module space between	
Weight	0.4oz (10g)±5%	Lifespan	MTBF>50000hours
Environment parameters			
Working temperature	-40℃?60℃		
Defend grade	IP68 completely satisfies the outdoor lighting standard		
Electronic specifications			
Working input voltage	D12V±5%	Max power	0.21 W
Driving mode	Invariable voltage! (Insure every LED working under the invariable voltage)		
Lighting capability			
Luminous flux	0.6floz (18lm)		
Beam angle	120°		



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com