



3-SMD 3528S Non Water-proof Module 33x10mm

Item Code: LED module-LBY-3F12T3310-3CNWF



FOB Price: **\$0.33/pc**

Mini Order: 200 pcs

Average Rating: 1b (kg)

[Inquire Now](#)

Overview


Characteristics:

- . High brightness LED SMD as a lamp-house, with wide angle view and a small aperture.
- . Controlled by the chips with constant current, has a steady current between the cathode and the anode.
- . Low voltage, safe and jarless.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Longlife above 80,000hrs.
- . Low power consumption, energy conservation and made for save electricity.

Usage:

LED SMD modules are widely used for solid lighting character, LED signs, LED lighting box, scenery designs and decoration, etc.

Sample:

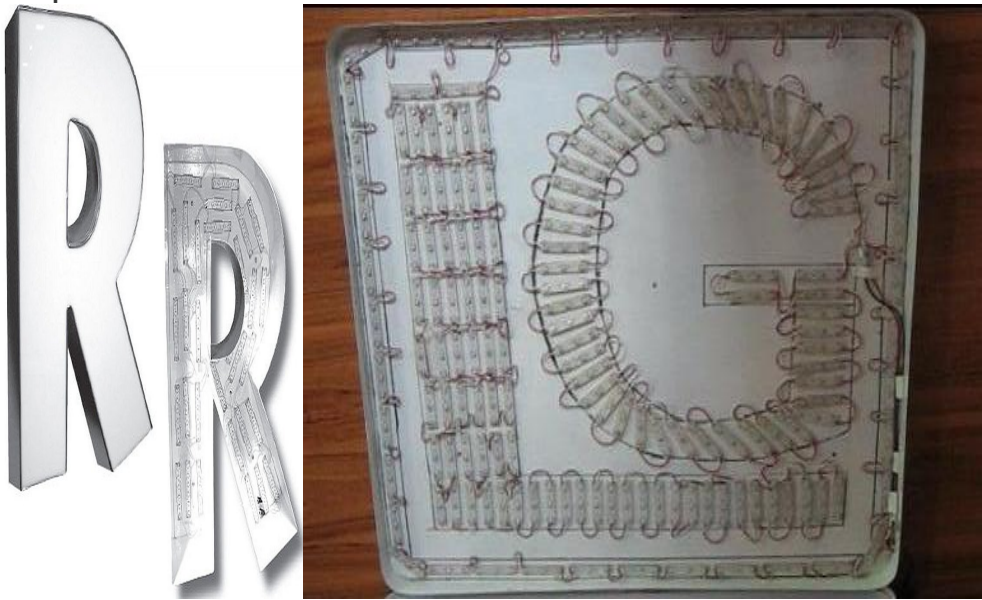

Details

| | |
|-------------------|-------------|
| Material | Plastic |
| LED Number | 3 |
| SMD Package Model | 3528 |
| Color | White |
| Shape | Rectangular |
| Brightness | Low |

Specifications

| Basic parameter | | | |
|------------------|---|----------------------|--------------------------|
| Color | Red yellow blue green white | LED type | 3528 SMD |
| Power | 54 | W | |
| LED quantity | 3PCS | Demension | 1.3"*0.4" (33*10mm) |
| Module interface | Gray0.5mm 0.1"*3.0" (2*75mm) RVleads | Interface definition | Gray anode,white cathode |
| Cluster quantity | 20pcs | Module space between | |

| | | | |
|--------------------------|--|-----------|-----------------|
| Weight | 0.4oz (10g)±5% | Lifespan | MTBF>50000hours |
| Enviroment parameter | | | |
| Working temperature | -40℃?60℃ | | |
| Outdoor level | IP20 not waterproof | | |
| Electronic specification | | | |
| Input voltage | D12V±5% | Max power | 0.21 W |
| Driving mode | Invariablenes voltage (Insure every LED working under the invariablenes voltage) | | |
| lighting capability | | | |
| Luminous flux | 0.6floz (18lm) | | |
| Beam angle | 120° | | |



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com