



P7.62 Indoor integrated 3 in 1 Full Color Screen

Item Code: FC-LJ-P7.62 integrated



FOB Price: ??? 99 541.00/?²

Mini Order: 1 ?????????

Average Rating: lb (kg)

[Inquire Now](#)

Overview


Description:

3 in 1 full Integrated color is our patented product. It has color blending ability, high brightness and a wide viewing angle.

Advantages:

- High resolution: the resolution is up to 40000dots/sq.m. It provides a good effect for exhibitions and vivid picture.
- Color blending: With RGB in one pixel plus reasonable cavity reflection and permutation, the color is mixed as the conventional LED lamp and will get a blending effect at a certain distance.
- Anti-static property: Innovative mechanical design of cavity reflection and configuration of the RGB chips.
- High reliability: The LED DOT-MATRIX has a nice even surface.
- Wide viewing angle: 140° (horizontal).
- Color consistency: The LED chip's high pure colors and the 100% peroxide resin of the pharo's times, provide the perfect display effect.
- High brightness: The 4 x 4 module (utility model patent), can achieve a 1/4 scanning rate and is able to further enhance its brightness.

Details:

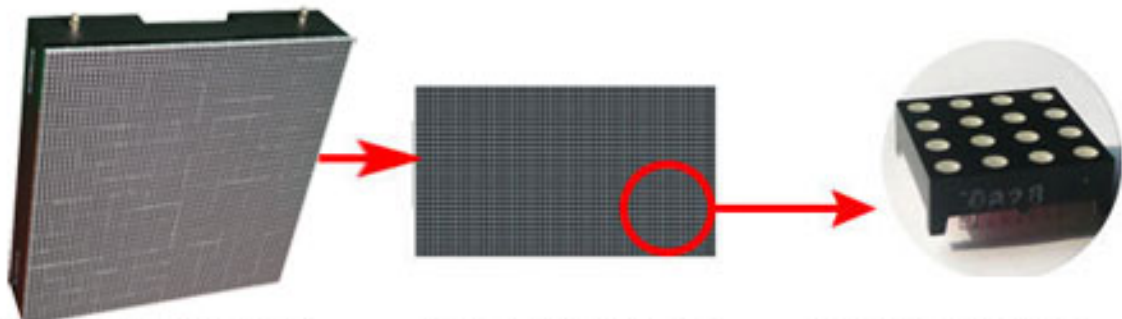

Name: Lightking P7.62
size: 976mm × 732mm × 120mm

Size: 488mm × 244mm
Resolution: 64 × 32

Pixel Pitch: 7.62mm
Size of Pixel: 4mm (circle)

Free training:

We will provide free training of how to maintain and repair. And you can send your staff who have electronics knowledge to our factory to receive training.

Specifications

Specification:

Pixel pitch	0.3" (7.62mm)	Pixel size
Block module size	1.2" x 1.2" (30.2 x 30.2mm)	Pixels in block module
Module size	19.2" x 9.6" (488 x 244mm)	Module resolution
Cabinet size	38.4" x 19.2" x 4.7" (976 x 488 x 120mm)	Cabinet resolution
Cabinet size	0.0572 sq.m	Pixel density
Pixel configuration	1R1PG1B	Best viewing distance
Brightness	?1200cd/sq.m	Maximum power consumption
Horizontal viewing angle	140°	IP grade
Driving device	constant current	Driving method
Colors	16777216	Color temperature
Gray scale	14 bits	Refresh frequency
Control method	Synchronization	Working temperature
Frame frequency	?60Hz	MTBF
Working voltage	AC220V/110V±10%	Life span



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email: info@sign-in-china.com Tel: +86 132 6410 3286 www.sign-in-china.com