




4-SMD 3528 Non water-proof module 35x35mm

Item Code: LED module-LBY-3F12T3535-4CNWF

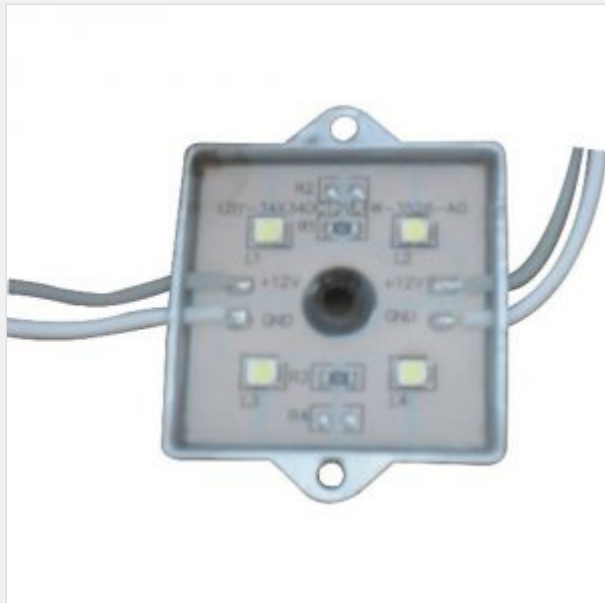

FOB Price: **\$0.65/pc**

Mini Order: 200 pcs

Average Rating: 1b (kg)

[Inquire Now](#)

Overview


Characteristics:

- . High brightness LED SMD as a lamp-house, with wide angle view and a small aperture.
- . Controlled by the chips with constant current, has a steady current between the cathode and the anode.
- . Low voltage, safe and jarless.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Longlife above 80,000hrs.
- . Low power consumption, energy conservation and made for save electricity.

Usage:

LED SMD modules are widely used for solid lighting character, LED signs, LED lighting box, scenery designs and decoration, etc.

Sample:

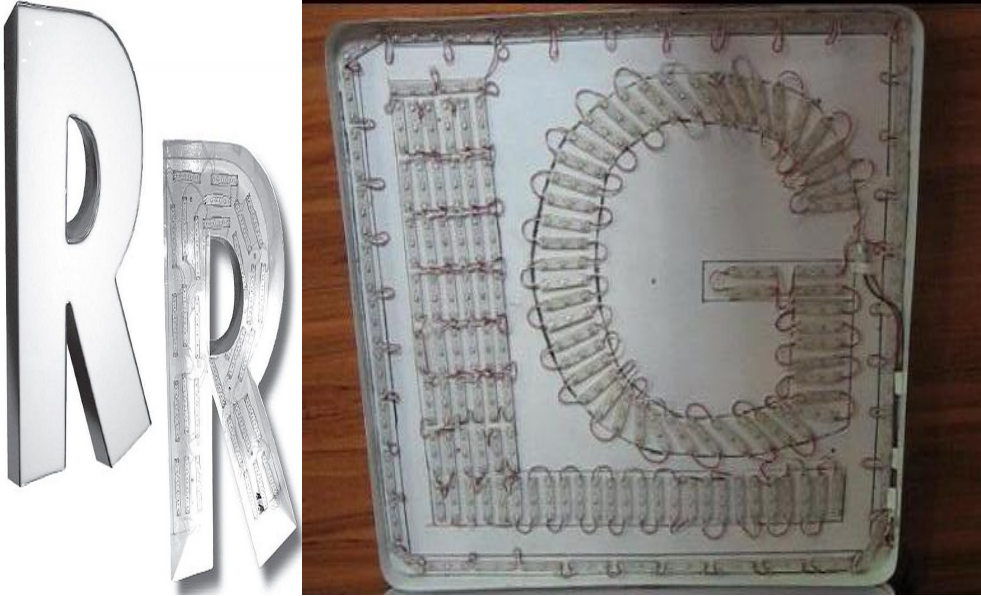

Details

Material	Metal
LED Number	4
SMD Package Model	3528
Color	White
Brightness	Low
Shape	Square

Specifications

Basic parameter			
	Red yellow blue green white		
Color		LED type	3528 SMD
	4PCS		
LED quantity		Demension	1.4"*1.4" (35*35mm)
Module interface	Gray0.5mm 0.1"*3.0" (2*75mm) RVleads	Interface definition	Gray anode,white cathode
Cluster quantity	20pcs	Module space between	
Weight	0.4oz (10g)±5%	Lifespan	MTBF>50000hours
Enviroment parameter			

Working temperature	-40°C~60°C		
Outdoor level	IP20 not waterproof		
Electronic specification			
Input voltage	D12V±5%	Max power	0.28 W
Driving mode	Invariableones Voltage(Insure every LED working under the invariableones voltage)		
Lighting capability			
Luminous flux	0.8floz (24lm)		
Beam angle	120°		



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com