

4-SMD 3528 Water Proof Module 35x35mm

Item Code: LED module-LBY-3F12T3535-4CWF



FOB Price: \$0.65/pc

Mini Order: 200 pcs

Average Rating: Ib (kg)

Inquire Now


Overview

Characteristic:

- . High brightness LED SMD as a lamp-house, having a wide angle view and petty aperture.
- . Controlled by the chips with constant current, having constant working current and indiscriminate between the cathode and anode.
- . Low voltage, safe and jar less.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Long life time, above 80000hrs.
- . Low power consumption, energy conservation and saving electricity.

Application: This LED SMD module is used for solid lighting character, LED signs, LED lighting box, scenery designs, décor, etc.

Sample:

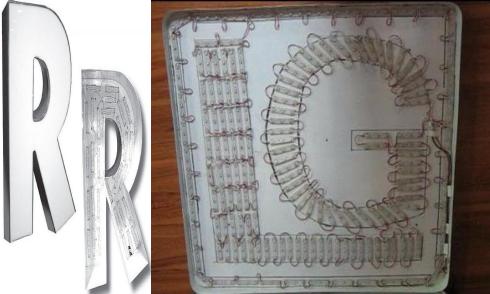

Details

LED Number	4
SMD Package Model	3528
Color	White
Shape	Square
Brightness	Low
Material	Metal

Specifications

	Basic parameters		
	Red, yellow, blue, green, white		
Color		LED type	3528 SMD
	4PCS		
LED Qty		Dimension	1.4" x 1.4" (35 x 35mm)
	Gray0.5mm 0.1" x 3.0" (2 x		
Module interface	75mm) RVIeads	Interface definition	Gray anode, white cathode
		Module space	
Cluster Qty	20pcs	between	
Weight	0.4oz (10g)±5%	Lifespan	MTBF>50000hours

Environment parameters						
		•				
Working temperature	-40°C?60°C					
Defend grade	IP68 completely satisfies the outdoor lighting standard					
Electronic specifications						
Working input voltage	D12V+5%	Max power	0.28 W			
Driving mode	Invariable voltage! (Insure every LED working under the invariable voltage)					
Lighting capability						
Luminous flux	0.8floz (24lm)					
Beam angle	120°					



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com