

4 SMD LED Module, White 3528 LED(50mmx14mm stainless steel)

Item Code: LED module-LBY-TK504F-CWF



FOB Price: \$1.37/pc

Mini Order: 200 pcs

Average Rating: Ib (kg)

Inquire Now


Overview

Characteristic:

- Using high brightness LED SMD as the lamp-house, having wide viewing angle and petty aperture.
- Controlled by the chips with constant current, having constant working current and indiscriminate between the cathode and anode.
- Low voltage, safe and jar less.
- With a settled orifice and 3M gummed paper, very convenient to install.
- Long life time. above50000hrs.
- Low power consumption, energy conservation and saving electricity.

Application:

This LED SMD module is widely used for solid lighting character, LED signs, LED lighting box, scenery designs, décor, etc.

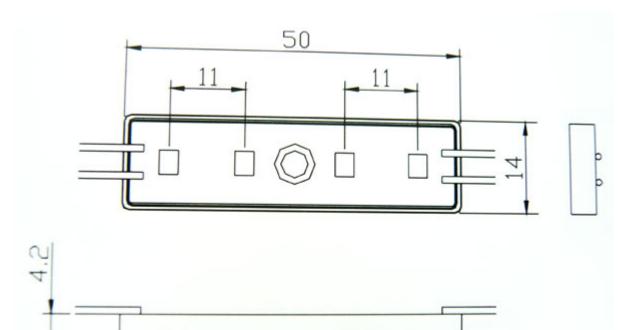

Details

| LED Number | 4 | |
|-------------------|-------------|--|
| SMD Package Model | 3528 | |
| Color | White | |
| Shape | Rectangular | |
| | High | |
| Brightness | High | |

Specifications

| Basic parameters | | | | |
|---------------------------|---|----------------------|---------------------------|--|
| Color | White, red, yellow, blue, green | LED type | 3528 SMD | |
| LED Qty | 4 pcs | Dimension | 50 x 14 x 4.2mm | |
| Module interface | Gray 0.5mm2×75mm RVleads | Interface definition | Gray anode, white cathode | |
| Cluster Qty | 20pcs | Module space between | | |
| Weight | 25g±5% | Lifespan | MTBF?50000hours | |
| Environment parameters | | | | |
| Working temperature | -30?~ 50? | | | |
| Defend grade | IP65 | | | |
| Electronic specifications | | | | |
| Working input voltage | D12V±5% | Max power | 0.6W | |
| Driving mode | Invariable voltage! (Insure every LED working under the invariable voltage) | | | |
| Lighting capability | | | | |
| Luminous flux | 26lm | | | |
| Beam angle | >120° | | | |





















Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com