


# 43" Cabinet Frame Full-auto Multi-function Double Sides Hot Laminator

Item Code: FMJ-1100-ZD

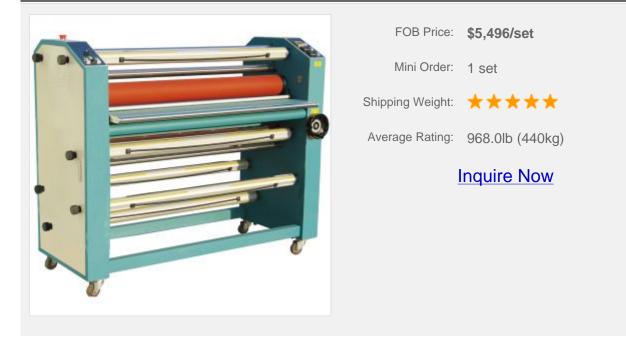

## **Overview**

### Cabinet Frame Full-auto Multil-function Double Sides HOT/COLD Laminator

Roll-to-roll supported operation to maximize productivity.

Laminating procedures includes: Single side and double sides hot laminating; single and double sides cold laminating The FMJ-ZD series laminator is a dual roller HOT laminator, capable of running a wider range of media and generate higher process speeds. These characteristics makes this range of machines ideal for business that are looking to build in extra capacity and more versatility.

It's a perfect fit for owners of lower end laminators, looking to upgrade to a professional production machine. The machine is available in43.3" (1100mm), 51.2" (1300mm), 63.0" (1600mm), and 80.7" (2050mm) models

### **Products highlights:**

. Dual heat rollers.

- . 43" (1,092mm), 51" (1,295mm), 63" (1600mm), and 81" (2,057mm), working film width for your convenience.
- . 3" (76mm)core auto-grip rollers for easy laminating film setup.
- . 5" (127mm) rollers for best quality laminating control. 1" (25mm) maximum nip opening for wide range substrate.
- . Easy operation panel:
  - Forward and backward
  - Foot pedal control
  - Various speed and temperature adjustment
- Emergency stop button
- . In order to coat different media thickness, the laminator is equipped with a roller that comes with a lifting height indicator.
- . Paired with photocell eye, it can protect the roller from damaged.
- . Offer industrial performance at exceptional value.
- . Good choice for high-end volume user for mounting, laminating and encapsulating projects.
- . . Roll-to-roll supported operation to maximize productivity.
- . Electric model, with stepless speed regulating, foot pedal switch for hands free operation.
- . Automatic take-up roll for both printed images and back paper.
- . The cabinet frame design makes the structure more stable for working

- . Silicone high release rollers for easy cleaning.
- . Equipped with optical sensor and emergency stops for safety operation.

#### **Application:**

After printing finishing equipment. Available for photographic, advertising and copy shops to do lamination work, adding protective layer on books cover, photography, color pages, documents, charts, drawings, indoor advertising products, etc.

#### Applicable Laminating Medium:

Photopaper, PP, self adhesive, PP, backlit or transparent film.

### Warranty and aftersales service:

One year warranty. 24-hour technical service support by email or calling. User-friendly English manual for machine using and maintenance.

## **Details**

Motor Power	90W
Heating Method	Infrared heating lamp
Laminating Speed	0-196.9" (0-5m)/min
Roller's Diameter	5.0" (128mm)
Max Laminating Thickness	0.9" (23mm)
Max Laminating Width	40.9" (1040mm)
Operating Method	Electric

## **Specifications**

#### **Specification:**

Model	FMJ-1100-ZD
Max. laminating width	43.3" (1100mm)
Max. laminating thickness	0.9" (23mm)
Heated roller	Top and bottom
Max. heating temperature	150°C
Laminating speed	0-196.9" (0-5m)/min
Forward / Reverse	Yes
Foot pedal	Yes

Emergency stop	Yes
Auto rewind liner pickup	Yes
After laminating pickup	Yes
Roller' s diameter	5.0" (128mm)
Media core size	3"
Heating power	2000W / single roller heating, 5000W / double rollers heating
Motor power	90W
Power	The voltage is up to the local requirement, like AC 80V-110V, AC 110V-240V, AC 380V; The current is 50 / 60Hz
Machine weight	360kg (793.7lb)
Machine dimension	58.3" x 29.1" x 54.7" (1480 x 740 x 1390mm)
Package	Fumigation free package
Packing size	61.8" x 33.1" x 59.8" (1570 x 840 x 1520mm)
Gross weight	440kg (970lb)

# Tags

43" Cabinet Frame Full-auto Hot Laminator 43" Multi-function Double Sides Hot Laminator



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com