


63" Cabinet Frame Full-auto Double Sides Hot Laminator

Item Code: FMJ-1600-RFZS

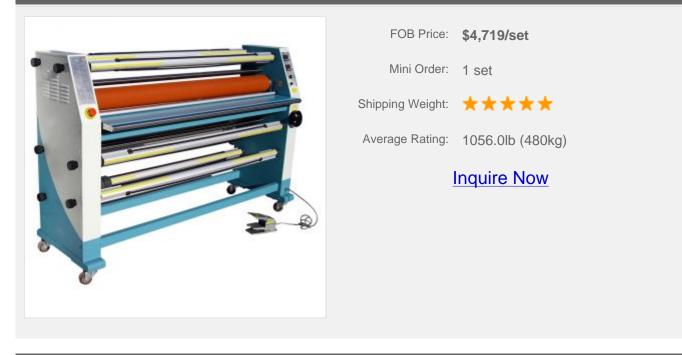

Overview

Cabinet Frame Full-auto Self-peeling and Dual Rollers Heated Model.

Both for Board or Rolling Medium.

Support Roll to Roll operation- maximize your productivity.

Laminating procedures: Single side hot laminating, double sides hot laminating, and single side cold laminating, or double sides cold laminating

The FMJ-RFZS series laminator is capable of running a wider range of media and can generate higher process speeds, which make this range of machines ideal for business that are looking to build in extra capacity and more versatility.

A perfect fit for owners of lower-end laminators, looking to upgrade to a professional production machine.

Available in 43.3" (1100mm), 51.2" (1300mm), 63.0" (1600mm), 66.9" (1700mm), 80.7" (2050mm), 90.6" (2300mm) model

Products Highlights:

- . Dual heat rollers and temperature controllers' model, which can control temperature respectively.
- . 43", 51", 63", 67", 81", 91" Maximum working film width for your option.
- . 3" core auto-grip rollers for easy laminating film setup.
- . 6" bigger rollers for best quality laminating control. Maximum nip opening up to 1" for a wide material range of film and substrate.
- . Easy operation panel:
 - Forward, Backward
 - Foot Pedal Control
 - Various speed and tempreture adjustment
 - Emergency Stop Button
- . In order to coating different thickness of material, the laminator is equipped with indicator for lifting height of roller.
- . Matched with photocell eye, it can protect the roller from damaged.
- . Offer industrial performance at exceptional value.
- . Good choice for high-end high volume user for mounting, laminating and encapsulating projects.
- . Support Roll to Roll operation- maximize your productivity.
- . Electric model, stepless speed regulating, foot pedal switch for hands free operation.
- . Taking up and rolling back paper and picture automatically.
- . Cabinet frame design makes the structure more stable, working more stable.
- . High release silicone rollers for easy cleaning.

. Equipped with optical sensor and emergency stops for safety operation.

Application:

Laminator is belong to after printing equipment. Available for photographic, Ad. Shop and copy shop to do lamination work, adding a protective layer on books cover, photographic, color pages, documents, charts, drawings, indoor advertising products, etc.

Applicable Laminating Medium:

Photopaper, PP, part of self adhesive PP, backlit film or transparent film.

Guarantee & Aftersales Service:

Comprehensive guarantee for one year. 24-hour technical support by email or calling. User-friendly English manual for machine using and maintaining.

Details

Maxim	um Laminating Width	63" (1600mm)
Maximum L	aminating Thickness	1" (25mm)
Rollers Diameter		5" (128mm)
Maximum Laminating Speed		197" (5m) / min
Maximum Internal Diameter of		3"
	Profile	Full-auto hot / cold laminator machine (Automatic take-
		up roll for both printed images and back paper by one
Specifications		person), with functions of double or single sided hot
Specification:		laminating, single or double sides cold laminating, low
		temperature cold laminating, mounting and
		encapsulating. Cabinet Frame, all-metal casing shell,
		more stable working performance. Dual heat rollers
Model		and temperature control
Max. Laminating Width	63.0" (1600mm)	temperature respectively. High value-added products-
		Capable of running a wider range of media and can
Max. Laminating Thickness		generଥିଥି (ସିହିମାଙ୍ଗ) process speeds.
Heated Roller		Top and bottom
Max. Heating Temperature		150°C
Roller heating temperature		40-50°C
Upper roller during cold laminat	ing	40-50°C
General setting during hot laminating		100°C
Laminating Speed		0-196.9" (0-5m)/min

Forward / Reverse	Yes
Foot Pedal	Yes
Emergency Stop	Yes
Auto Rewind Liner Pickup	Yes
After Laminating Pickup	Yes
Roller's Diameter	5.1" (130mm)
Media Core Size	3"
Heating Power	2000W / single roller heating, 5000W / double rollers heating
Motor Power	90W
Power	The voltage is up to the local requirement, like AC 80V-110V, AC 110V-240V, AC 380V; The current is 50 / 60Hz
Machine Weight	793.7lb (360kg)
Machine Dimension	78.0"*24.0"*50.4" (1980*610*1280mm)
Package	Fumigation free package
Packing Size	82.3"*27.6"*56.7" (2090*700*1440mm)
Gross Weight	981.0lb (445kg)

Tags

63" Cabinet Frame Full-auto Double Sides Hot Laminator Hot Laminator



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com