


74" (1800mm) Eco Solvent Large Format Printer

Item Code: LFIP-LCSJ1800

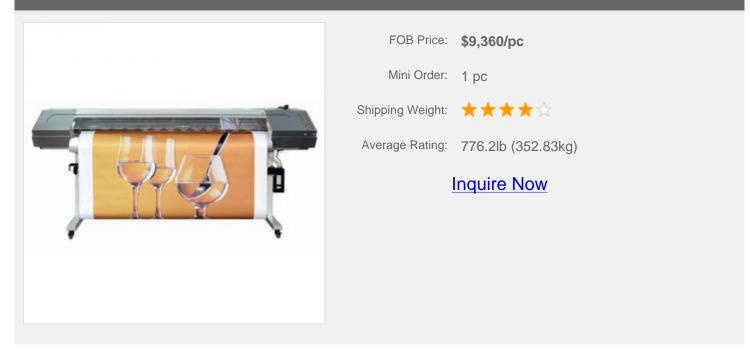

Overview

FREE: Photoprint RIP & Original Accessory Kits

Characteristics:

- . High transmission precision and long lifespan for precise gear-occlude directly transmission is adopted.
- . Thanks to the THK guide rail the printer produces low noise during the printing process. High durability printer.
- . Adopts advanced variable dot print technology; the minimum dot reach 3.5pl, maximum 27pl.
- . With particular two-dimension intelligent eclosion and wave eclosion print function could avoid Banding in printing process.
- . The printer has an automatic cut system, in which the user can select between manual or automatic, saving time and labor.
- . The system supplies 6 different printing pass modes The users can select various materials and printing qualities.
- . The printer is equipped with eight 17.6oz (500ml) cartridges which supply ink for one line nozzle separately, so it ensures output big heavy picture with high speed.
- . The printer takes the lead launching the quick drying ink, it dries immediately after printing.




Auto-cutting paper system



DX5 piezo print head (24.5mm wide) with 8 lines of nozzles



Gear-occlude







THK guide rail

Input mode of dual 4-color

High quality fluid damp

Description:

LFIP-LCSJ1800 is a wide format printer, of which the printing width is 1.8M, and its suitable ink is Eco-Solvent ink. This printer adopts DX5 piezo printing head which is 1.0" (24.4mm) wide and 8 lines of nozzles. What's more, every line contains 180 nozzles, with a total of 1440 nozzles.

Application:

Adopting standard 6-color or dual 4-color print which outputs delicately and colorfully, it is suitable for advertising production and other high demand for multicolor output.

Samples:



Specifications

Product parameter

Model	LFIP-LCSJ1800		
Print head	MicroPiezo printhead Epson DX5		
Ink	eco-solvent ink		
Color mode	Dual CMYK		
Nozzles	(180nozzles*8lines)*1head		
Print head height	0.1" (1.5mm)/0.1" (2.5mm)(Adjustable)		
Ink supply method	Block brake type cartridge		
Feed paper method	Multi-press feed paper		
Usable materials	One way vision, adhesive vinyl film, cold laminating, outdoor light, banner cloth, photopaper.		
Cut	Auto/Manual		
Max material width	74.0" (1879mm)		
Max printing width	73.6" (1869mm)		
Min printing margin	0.2" (5mm)		
Printing resolution and speed	Resolution(dpi)		Speed
	540*720(6pass)		12.5m2/h
	700*700	4pass	17.5?/h
	720*720	8pass	10m2/h
	1440*720(8pass)		4.2m2/h
	14440*1440(16pass)		2.4m2/h
Roll outer diameter	2(In.)/3(In.)		
Material	Single paper(feed front), Roller paper(feed rear)		
Maximum weight for roll material	88.2lb (40kg)		
Interface	USB 2.0/ Hi USB		
RAM	128M		

Roller		Option	
Printing language		Standard printer languages	
Power		AC100-120V/AC220-240V(Adaptive),50/60Hz±1Hz	
Power consumption	Printing mode	100W	
	Standby mode	40W	
Acoustic noise		?50dB	
Environment		Temprature:20-32°C, Humidity:40-60%(Non-condensing)	
Dimension/Net Weight		107.9"x30.0"x49.2" (2740x750x1250mm)/374.8lb (170kg)	
Packing size/Gross Weight		107.9"x30.0"x49.2" (2740x750x1250mm)/551.2lb (250kg)	

Tags

74" Eco Solvent Large Format Printer Eco-Solvent Large Format Printer large format eco solvent printer eco solvent printer wide Format Printer

QA	
Q	What is the daily maintenance I need to perform?
A	We shall send a <u>user manual</u> along with the package, Please refer to the page 62, 63, 65 and 66 in manual user. Reply by <u>sign-in-china</u>



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com