


80" Flatbed Board Cold Laminating Machine

Item Code: FMJ-2040-FM

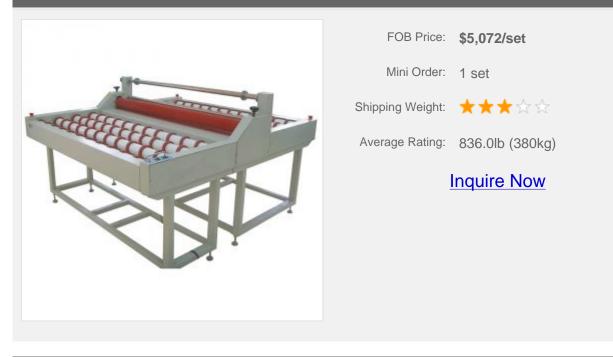

Overview

FMJ-FM Series FLATBED ELECTRIC COLD Laminator

Special used for wooden board or glass, include floor stand Available in 51.2" (1300mm), 63.0" (1600mm), 80.3" (2040mm) max. laminating width

Product Highlights:

- . 55", 63" Maximum working film width for your option.
- . 6" bigger rollers for best quality laminating control. Maximum nip opening up to 1" for a wide material range of film and substrate.
- . A perfect fit for flatbed material to laminate.
- . Available for laminating wooden board or glass to avoid surface scraping during transportation.
- . The front and rear working table makes the flatbed board or glass going stably and safely.

. Two rollers (front also rear) are driven by motor and take another two free rollers going in-phase, which making the flatbed mounting job more mechanical, more efficient.

Application:

The cold laminator is specially used for wooden board or glass.

Guarantee & Aftersales Service:

Comprehensive guarantee for one year. 24-hour technical support by email or calling. User-friendly English manual for machine using and maintaining.

Details

Maximum Laminating Width

80" (2040mm)

| Maximum Laminating Thickness | 1" (25mm) | |
|---|--------------------|--|
| Rollers Diameter | 6" (155mm) | |
| Maximum Laminating Speed | Up to the operator | |
| Maximum Internal Diameter of | 3" | |
| Profile Single sided cold laminating for board materials. | | |
| bed construction. The front and rear working table | | |


Specifications

makes the substrate going stably and safely.

Specification:

| Model | FMJ-2040-FM |
|---------------------------|--|
| Max. Laminator Width | 80.3" (2040mm) |
| Max. Laminating Thickness | 0.9" (23mm) |
| Laminating Speed | 0-196.9" (0-5m)/min |
| Foot Pedal | Yes |
| Emergency Stops | Yes |
| Roller's Diameter | 6.1" (155mm) |
| Power Supply | AC 80V-110V, AC 110V-240V; 50 / 60Hz |
| Motor Power | AC160W |
| Machine Weight | 661.4lb (300kg) |
| Machine Dimension | 86.6"*55.9"*44.1" (2200*1420*1120mm) |
| Package | Fumigation free package |
| Packing Size | 93.0"*62.6"*50.0" (2360*1590*1270mm) (wooden case) 92.9"*62.6"*41.3" (2360*1590*1050mm) (wooden case) |
| Gross Weight | 837.8lb (380kg) |

| QA | | |
|----|--|---|
| Q | For different film and glass thickness, will the pressure has to be different? | |
| A | Yes. | Reply by <u>sign-in-china</u> |
| Q | Do we need to readjust the pressure knob manually every time we change the film and glass thickness? | |
| A | Yes. | Reply by <u>sign-in-china</u> |
| Q | Will it be necessary and expensive to add programmable pressure adjusting system to the machine? | |
| A | There isn't programmable pressure adjusting system. | Reply by <u>sign-in-china</u> |
| Q | Does it need to use any wooden board to back up the glass panel when being laminated or just glass pane | el only? |
| A | There is the front and rear woking table makes the flatbed borad or glass going stably and safely. | Reply by <u>sign-in-china</u> |
| Q | Is there any of your customer using the machine to laminate safety film to glass and what are their experie machine? | nce to your |
| A | Yes, many clients do this, and they are satisfied with this machine. | Reply by <u>sign-in-china</u> |
| Q | Since we do not know the limitation of the machine. How can we be sure the machine work up to our stand | dard? |
| A | Please read the USER MANUAL carefully before operation, lamination effect has big relation with o laminating film quality. | operator's skill and Reply by <u>sign-in-china</u> |
| Q | We plan to visit few company to observe the machine, will it be ok for your company for this visit? | |
| A | Yes, sure, welcome. | Reply by <u>sign-in-china</u> |

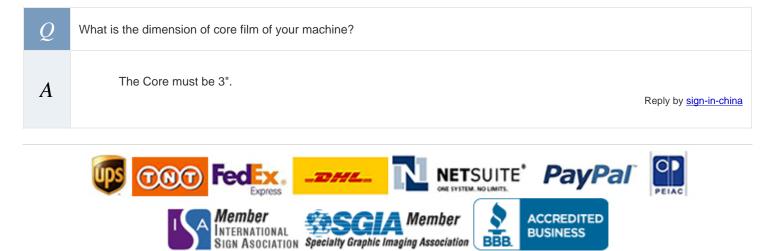

Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com