

High Power 3 SMD LED Module, White LED 1.2W 75x29mm

Item Code: LED module-RS-M303C-3WF



FOB Price: \$3.18/pc

Mini Order: 200 pcs

Average Rating: Ib (kg)

Inquire Now

Overview

Basic parameters				
Color	White	LED type	high power	
LED Qty	3 pcs	Dimension	75 x 29 x 5.9mm	
Module interface	Gray 0.5mm2×75mm RVleads	Interface definition	Gray anode, white cathode	
Cluster Qty	30	Module space between		
Weight	10g±5%	Lifespan	MTBF?50000hours	
Environment parameters				
Working temperature	-25?~ 60?			
Defend grade	IP65			
Electronic specifications				
Working input voltage	D12V±5%	Max power	1.2W/PCS	

Driving mode	constant current driving		
Lighting capability			
Luminous flux	82lm		
Beam angle	120°		

It fits for 12-20cm height logo and signage.


Product Features:

- High luminous efficiency: The I uminous flux can reach 82Im/PCS, The luminous efficiency can reach 68 Im/W.
- High reliability: It imports led from `international` leading enterprise, excellent constant current driver circuit design reduce the maintenance frequency and ensure the module to work long and stable.
- Long lifetime: Has a service life of 40000h and a long warrantee period.
- Easy installation: Each string contains 30 units module, and 3 pieces module in one unit. You can cut between the module units.
- Widely used in 12 to 2 0cm depth channel letters and sign cabinets.

Application:

This LED SMD module is widely used for solid lighting character, LED signs, LED lighting box, scenery designs, décor, etc.

External dimension:

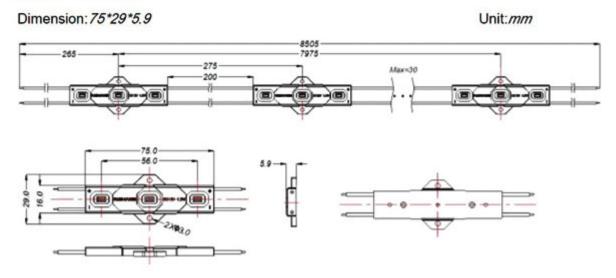

Details

Material	Plastic
SMD Package Model	Other
Color	White
Shape	Rectangular
Brightness	High

LED Number

























Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com