


High Quality Bubble-free White Glue Self-adhesive Vinyl Film/Vehicle Wrap

Item Code: BS-SC100-50R-PY



Overview

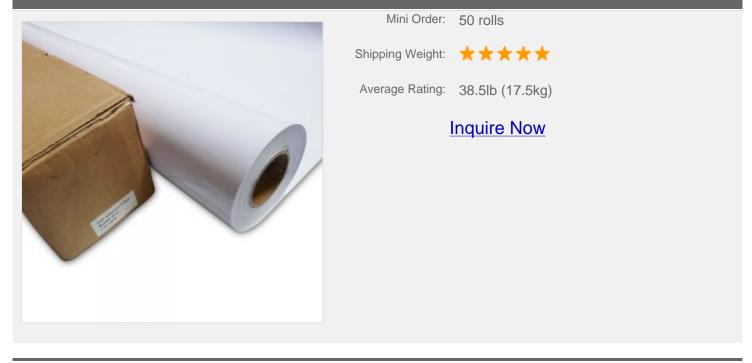

Characteristics:

- This Self-Adhesive Vinyl use the white glue. and the performation of coverage is well.
- •T he surface film has the good performance of the ink obsorbing, can be applied to a wide range of inkjet printers.
- Use the removable glue, to ensure the cleanliness of the bottom paper and facilitate to the second use





High Quality Bubble-free White Glue Self-adhesive Vinyl Film/Vehicle Paster

—Sizes (Double standards):

1.27*50m;50"*54.6Y

- —Net Weight: 15.8kg
- -Glue: White (removable)
- -Thickness: 80 Micron
- -Weight of Release Paper: 140g/m²






Usage:

Put our high quality bubble-free & white glue self-adhesive vinyl film/vehicle paster into inkjet printer, and print on the patterns designed.

The application of the printer types:

Solvent: Vutek, Noel, Scitex, DGI, Teckwin, Yaselan, Flora, Fitto, Infinity, GongZheng, LiYu. ECO solvent: Mutoh, Roland, 9.8' (3m), Mimaki and others.

Performance



The vehicle paster has high sun-resistant performance, the color effect of common materials against solarization can last at least more than three years, and it does fade, crack, oxidize, etc The vehicle paster is also called stick ers, but they are not ordinary paper. The vehicle pasters are made of high quality PVC materials as basic raw materials which have excellent waterproofness, and you totally no need to worry it to be damaged from washing and raining.



used for the wide format digital printing indoor and outdoor, the eco solvent printing and screen printing, mainly used in advertising of the windows of the buses, taxis, subway and other means of transport, glass wall advertising, windows of shopping mall advertising.



Large-format vehicle pasters/advertisement stickers are widely used.



The right side of vehicle



The left side of vehicle





Dry paste method

The procedures and tools: clean rags, flake flattener

• Clean the vehicle and keep it dry.

• Strip off the transfer film (the transparent film which is pasted on the vehicle paster) and the vehicle paster together; in general situations, please simultaneously paste the sticker, flatten and stripping the release paper.

• If the length and width of pasting area are less than 10 centimeters, you can paste after stripping off the transparent transfer film and sticker, but must pay attention on the unexpected adhesion or dust due to falling down.

• Forcibly and obliquely flatten with a clean rag or flake flattener for several times until the paster has no any bubbles, then remove the transparent transfer film.

We suggest not to solarize or wash within 24 hours.



Wet pasting method: it is suitable for wrapping large vehicles (two-person working together is recommended)

The procedures and tools: water sprayer, clean rag, flake flattener, snap-Off Knife, blow dryer

• After the vehicle body is cleaned, spray water on the area you paste with the paster by water sprayer- which is mainly used to reduce viscosity of the paster, and facilitate the position adjustment.

• Once the pasting position is confirmed, strip up the paster along with the transfer film (the transparent film which is adhered on the Reflective wrapper), from right to left (or top to bottom), press and flatten them onto the vehicle body with rag, at the same time, peel off the release paper.?

• Regarding to the handle or the bumper strip, cut off or enfold the paster according to the circumstance.

• Timely adjust the position of the graphics, repeatedly scrape off the bubbles and water with flake flattener from right to left in an oblique way after the position of the graphics is confirmed, and finally remove the transparent transfer film.

- Cut off when coming to the door and joint with snap-Off Knife, and paste the paster inwards wherever possible.
- Dry the water underneath the paster as much as possible, and use the blow dryer to heat moderately if the condition allows.

Suggestion: We suggest neither to solarize the vehicle within 24 hours, nor to wash it within 48 hours as far as possible.



Quality Inspection?







采用国际标准产品证书

冰岛

德国



【成 瑞十 瑞典 荷兰 奥他利 丹麦 比利时 苁兰

Specifications

Specification	
type	imported PVC
thickness	95 ± 5 micron
color	white?glossy
tensile strength	? 22 N/mm2 (MD / CD)
elongation	? 150 (MD / CD)
glossiness (20° Gardner)	? 50
shrink rate	? 0.8 %
surface tension	? 35 dn/cm
hiding rare	> 90 %
type	solvent-based transparent pressure-sensitive adhesiv
glue dry weight	20 ± 2 gsm
adhesion for 20 minutes	> 600g/25mm
adhesion for 24 hours	> 800g/25mm
shearing force	> 1000 min.
releasing force	50 - 150 g/50mm
type	ССК
color	white
basis weight	125 gsm
width	980 / 1070 / 1270/ 1370 / 1520
length	50 m/R(piece-ups?0)
three years(under conditions of proper usage and normal climate)	
It is made of imported PVC materials, has excellent digital printing and screen printing perfoemance, a signs and vehicle pasters and so on.	
	thickness color tensile strength elongation glossiness (20° Gardner) shrink rate surface tension hiding rare hiding rare glue dry weight glue dry weight adhesion for 20 minutes adhesion for 24 hours shearing force shearing force type color basis weight basis weight length



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com

Tags