



One Way Vison (transparent)

Item Code: BS-PO650-L-PY



FOB Price: **\$2.29/sq.m**

Mini Order: 50 rolls

Average Rating: 1b (kg)

[Inquire Now](#)

Overview

Introduction:

It is made of a PVC vinyl substrate. With the topcoated perforated white flex vinyl laminating, it is coated with a removable pressure sensitive acrylic black adhesive and backed with two sided poly coated lay flat white release liner. It allows stunning graphics on one side and clear, unobstructed view through the glass on the other.

The PVC face film is 160 micron.


The bottom paper is 180 gsm art-board paper.

Features:

- . The special material surface made, easy to absorb ink and the graphics are brilliant.
- . The liner is not perforated for easy loading in wide range printers.
- . Between 15° to 35° temperature range, the adhesive can be one year removability with no adhesive residue and it will not fall off.
- . The application conditions/temperature can be from 10° to 40°.

Application:

- . Great for vehicle advertisements on cars, buses, train, tram, etc.
- . Ideal for window advertisements on buildings, offices and shops etc.
- . Excellent resistance to a wide range of physical and climatic conditions.
- . Suitable for application onto transparent glass, acrylic, polycarbonate.
- . Widely used in retail outlets, POP displays, service stations, convenience stores, etc.

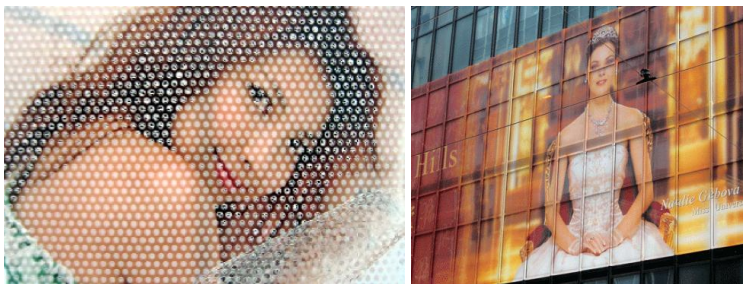

Application Notice:

- It can not be applied to windows surfaces that are angled (not vertical) or curved.
- The alkaline impregnant can not be used to scrub the surface of the product.
- If the products are used to substrates that are protected with anti-reflection or scratch resistant coatings, damage may occur when the film is removed.
- Applying over windows that are equipped with defrosters or windshield wipers.

Note:

Minimum application temperature: 10-15°.

Expected exterior life: 1 years.

Ideal Storage Condition: 1 year if the temperature 21°, relative humidity

$$50 \tilde{A} f \in \tilde{A}' \vdash \hat{a} \in {}^{\text{TM}} \tilde{A} f \hat{a} \in \tilde{S} \tilde{A}, \hat{A}^{-} \tilde{A} f \in \tilde{A}' \tilde{A} \hat{c} \hat{a}, \neg \hat{A} \vdash \tilde{A} f \hat{a} \in \tilde{S} \tilde{A}, \hat{A} \frac{1}{4} \tilde{A} f \in \tilde{A}' \tilde{A}, \hat{A} \hat{c} \tilde{A} f \hat{A} \hat{c} \tilde{A} \hat{c} \hat{a}, \neg \hat{A} \vdash \tilde{A}, \hat{A}^{-} \tilde{A} f \hat{a} \in \tilde{S} \tilde{A}, \hat{A}!$$

Details

Width	38.6",42",50"(0.9m,1.1m,1.3m)
Length	164.0 ft,328.1 ft(50m,100m)
Glue	Removable,Transparent
Line	150 gsm
PVC Face	140
GSM	150

Specifications

Item	Metric
Weight of art paper	140gsm
Thickness of PVC	150 micron
Width(inch)	38.6" , 42" , 50"



