

Photo Luminescent Tape FG series

Item Code: RS-2-FG302-HRS



FOB Price: **\$11.29/sq.m**

Mini Order: 1 roll


Average Rating: lb (kg)

[Inquire Now](#)

Overview

Description:

This is soft acrylic film made from aluminate, silicate and acrylic, with adhesive and liner paper on the back side. This film does not contain any nontoxic radioactive element, and is of bright illumination, long life and duration, environment friendly, stable chemical property, power saver, lacerable, digital cutting, screen printing. It can illuminate for more than 5 hours after shining in a short time.

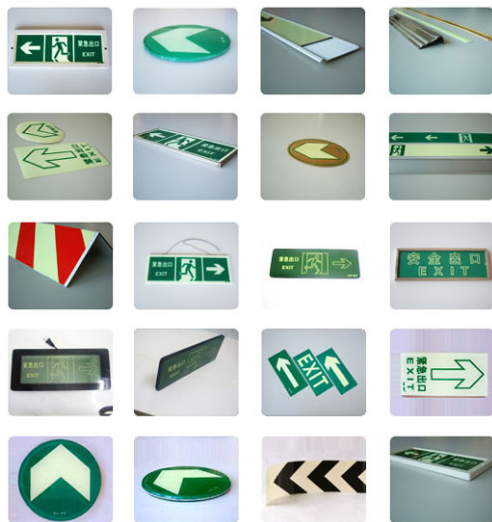

Feature:

- . Have stable chemical properties, non-toxic, non-radioactive.
- . High initial luminance.
- . Long duration.
- . Good extensibility.

- . Can be used in bad weather.
- . Good for computer cutting.
- . Feasible Operating Temperature: 18-28?.
- . Service Life: Indoor 20 years, outdoor 7 years.
- . Specification: 48.8"*149.9' (1.24m*45.7m) per roll.
- . Colour: light green.

Application:

Safe guiding, placename signs, traffic signs, mine, fire fighting.

Specifications

Technical specifications

Surface Film	Acrylic type
Thickness of film	0.125mm
Thickness of Glue	0.04mm
Thickness of Release Paper	0.18mm
Total thickness of products	0.345mm
Above thickness is with allowance of 5% more or less	
Weight of Release Paper	160g/sqm with 5% more or less
Type of Adhesive	Pressure-Sensitive Type
Strength of Adhesive	Strength of Adhesive: after sticking to the board for 24 hours, at the condition of 1.8lb length: 10cm, the falling Length?0.8" (2cm)
Operation temperature	10 °C-30 °C
Working temperature	- 20ÃfÆ'Ã+â€™Ãfâ€šÃ,ÃçÃfÆ'Ã,ÃçÃfÃçÃçâ,-Ã;Ã,Ã-Ãfâ€¡Ã,Ã¼ÃfÆ'Ãçâ,-Ã ÃfÃç 60ÃfÆ'Ã+â€™Ãfâ€šÃ,ÃçÃfÆ'Ã,ÃçÃfÃçÃçâ,-Ã;Ã,Ã-Ãfâ€¡Ã,Ã¼ÃfÆ'Ãçâ,-Ã ÃfÃç (After sticking to the board for at least 7 days)
Storage temperature	0 °C-30 °C



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com