




## Reflective Vinyl

Item Code: RS-4-NL300-NL

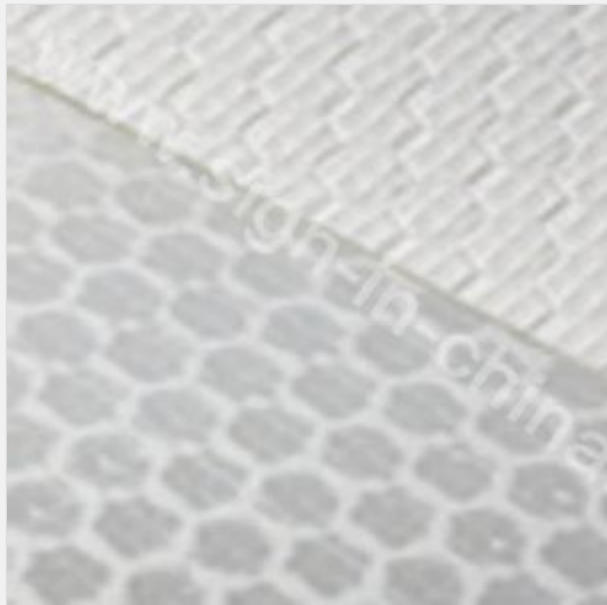

FOB Price: **\$4.91/sq.m**

Mini Order: 1 roll

Average Rating: 1b (kg)

[Inquire Now](#)

## Overview

### Description:

This product has four kinds of style in the surface: white reflective, star reflective, magic reflective, and fluorescence.

This product has a high reflectivity index(>300CPL), as such advertisement billboards and signages under dark conditions can be illuminated via a single light source. Another unique feature of CCGR is that ambient light from `city` lightings causes a flashing effect on the signages and billboards attracting attention from passer-by.

### Feature:

- . Can be used in bad weather.
- . High counter-reflectivity ability.
- . High visualization.
- . Excellent extensibility.
- . Good stickiness.
- . Having passed the certificate of national CCC compelling products.
- . Service Life: 10 years.
- . Length: 50m/ roll
- . Width: 86.6-126.0" (2.2-3.2m)
- . Colour: Red-white Stripe material.

### CHARACTERISTICS:

#### . SPECIAL CRYSTAL GLOW PROPERTY CCGR:

Combined many proven optical theories to create a glow effect that cannot be achieved by normal reflective materials. This special effect enhances the vibrancy of the advertisement and signage.

#### . EVEN TRANSPARENCY:

The translucence property (25-35% of light to pass through) and even distribution of light allow the materials to be used for both outdoor and indoor applications.

#### . COLOR FASTNESS UV8:

Color fastness grade and less than 10% yearly fading rated. This is especially important for light box application.

#### . GOOD INK ADSORPTION SURFACE PROPERTY:

This feature directly determines the color richness, color fastness and fading resistance property of the finished advertisements or signages. CCGR has a good ink adsorption and quick dry property hence enabling bright and realistic color effect on the printed subject.

**. UV PROTECTION:**

The outer protective layer of CCGR material protects the damaging effects of UV rays. This protects the materials and prevents fading of colors!

**. WATER PROOFING CCGR:**

As a whole is graded A class.

**. WEATHERPROOF:**

Cold weather and direct sun heat resistant. In general application, CCGR is rated to last for 36 months under outdoor conditions.

**. FLEXIBILITY CCGR:**

materials can be bent and stretched preventing damages such as tearing and deformation when subjected to such abuses.

**. TILING AND JOINING FLEXIBILITY:**

For large format advertising billboards and signages, CCGR supports various forms of joining methods that support large format applications.


**. EASE OF INSTALLATION:**

Can be mounted via adhesive or physically mounted via stretch and secure method.

**. DUST AND GRIME REPELLANT CCGR:**

Specially treated surface enables the surface to be resistant to dust and grime requiring less frequency of cleaning as well as maintaining the fresh-look longer.

**. BIOSAFE:**

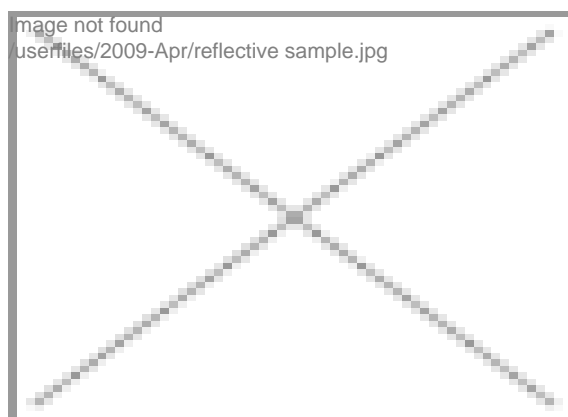

Surface is treated to prevent growth of fungus and bacteria.

**. FIRE RETARDANT:**

Flame retardant and self-extinguishing property.

**Applications:**

Advertisement billboards and signages under dark conditions can be illuminated via a single light source.

**Remarks:**

This film is defined into `2` types, one type has adhesive and liner paper on the back side, with a max width of 59.8" (1.52m), for digital cutting of simple logo, etc. the other type has PVC film on the back side, with a wider format, for outdoor inkjet printing as large reflective signage and advertisement.

---

## Specifications

---

Reflective Vinyl

Description	Art.No.	Weight	PVC	Glue	Width
White Reflective	BS-NL-300	308.6lb (140g)	0.38mm	White glue	53.1"/59.8"*164.0' (1.35/1.52m*50m)
Star Reflective	BS-NL-301	308.6lb (140g)	0.38mm	White glue	53.1"/59.8"*164.0' (1.35/1.52m*50m)
Magic Reflective	BS-NL-302	308.6lb (140g)	0.38mm	White glue	53.1"/59.8"*164.0' (1.35/1.52m*50m)
Fluorescence	BS-NL-303	308.6lb (140g)	0.38mm	White glue	53.1"/59.8"*164.0' (1.35/1.52m*50m) (Red/yellow/green/orange)

## Reflective Banner

Name	Art.No.	Fiber mesh	Construction	Weight (GSM)	Width	Thickness of PVC film
White Reflective	BS-NL-520	200D*500D	18*12	881.9lb (400g)	1.15/1.35/1.52/1.8/ 2.25/2.75/3.15*164.0' (50m)	0.20mm
Star Reflective	BS-NL-521	200D*500D	18*12	881.9lb (400g)	1.15/1.35/1.52/1.8/ /2.25/2.75/3.15*164.0' (50m)	0.20mm
Magic Reflective	BS-NL-522	200D*500D	18*12	881.9lb (400g)	1.15/1.35/1.52/1.8/ 2.25/2.75/3.15*164.0' (50m)	0.20mm



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com