


Product structure diagram

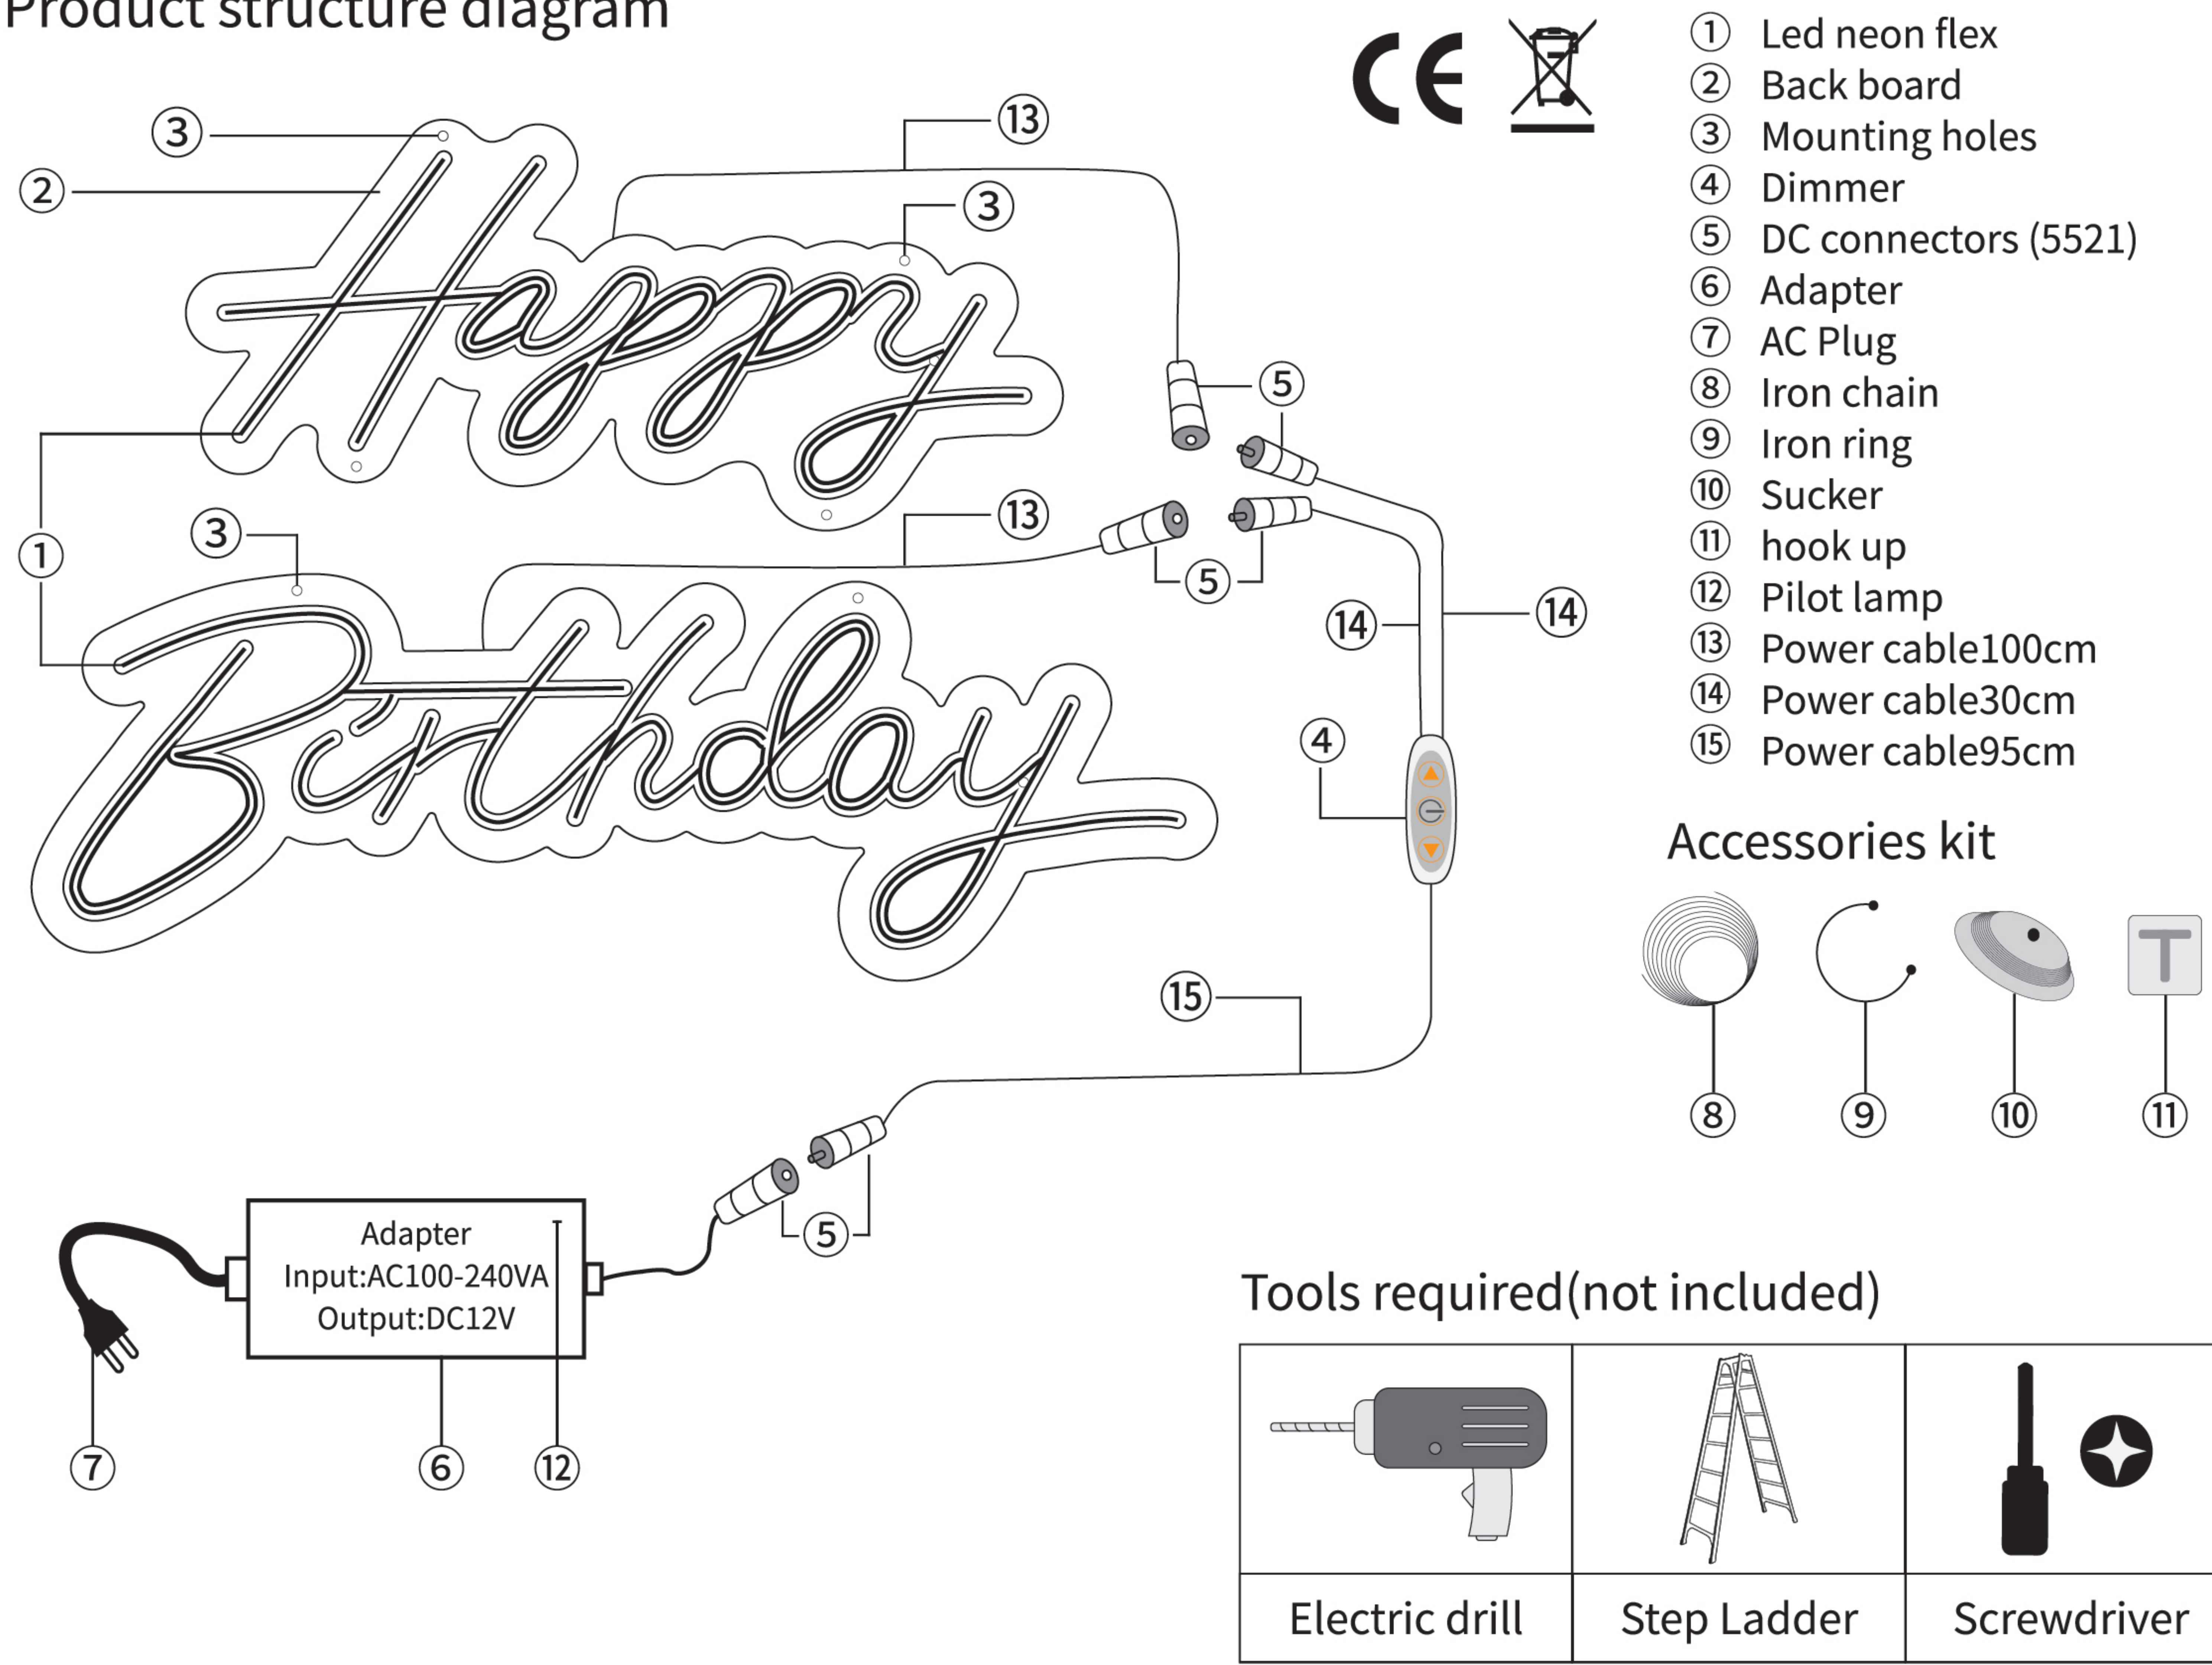

Product structure diagram

- 1 Connect DC connectors from Neon sign to adapter.
- 2 Connect AC plug cable with Adapter.
- 3 Power the Adapter.

SAFETY INFORMATION

Please read and understand this instruction before installation.

CAUTION

- 1 Shut down the AC power before installation.
- 2 The operation voltage of the product is DC 12V. Use power supply with appropriate output voltage or the product may be damaged.
- 3 Do not peel off the neon tubes from their back board.
- 4 Do not disassemble the product.
- 5 The power adapter and DC connectors are not waterproof and can not be used outdoors.
- 6 Keep the product away from fire or heat sources, or it may be damaged.
- 7 When the product starts up, it will delay by 2-3 seconds before working due to AC-DC transformation.
- 8 The pilot lamp will stay on as long as the power adapter is working. Please check AC plug and its connections if the pilot lamp is off or blinks. If this problem persists, the adapter may have been damaged and should be replaced by new one.
- 9 Prevent this product from getting wet.
- 10 If the product does not work after power on, please check the power adapter and its wires to make sure that they are connected reliably. If this problem persists, do not try to repair it yourself. Please contact your retailer or distributor for customer services.