



Solvent Resistant Wiper Blade for Roland DX4 heads - 1000003390 & 11379105

Item Code: ACC-ROL-012-R



Mini Order: 1 pc

Shipping Weight: ★★★★★

Average Rating: 0.0lb (0.001kg)

[Inquire Now](#)

Overview

Solvent Resistant Wiper Blade for Roland DX4 heads - 1000003390 & 11379105



Details

Solvent Resistant Wiper Blade for Roland DX4 heads - 1000003390 & 11379105

Printer Compatibility: Roland LEC-300 / LEC-300a / LEC-330 / LEC-540 / RS-540 / RS-640 / SJ-1045ex / SJ-645ex / SJ-745ex / SJ-1000 / SJ-500 / SJ-540 / SJ-600 / SJ-640 / SJ-740 / SJ-745ex / SJ-655 ex / CJ-400 / CJ-500 / CJ-540 / FJ-540 / FJ-740 / FJ-40 / FJ-400 / FJ-42 / FJ-50 / FJ-500 / FJ-52 / FJ-540 / FJ-600 / FLJ-300 / FP-740 / SC-500 / SC-540 / SP-300 / SP-300i / SP-300v / SP-540 / SP-540i / SP-540v / VP-300 / VP-540 / VP-300i / VP-540i / XC-540 / XC-540mt / XJ-640 / XJ-740 / LEJ-640 / LEF-12 / LEF-20

Part No.: 11379105/1000003390

Manufacturer: Ving Parts

Ink Type: For both solvent/eco solvent and water-based ink.

Net Weight: 1g

Product Size: 21mm*20mm*2mm




Solvent resistant silicone, no distortion, neither expansion nor contraction during usage.

Soft materials, 100% do NO harm to print head, but to clean the residual inks from the nozzle surface to improve print quality and extend print head service life.


Usages

3-2 WIPER REPLACEMENT


- 1 Turn on the SUB POWER SW while pressing the [CLEANING] key to enter the maintenance mode.

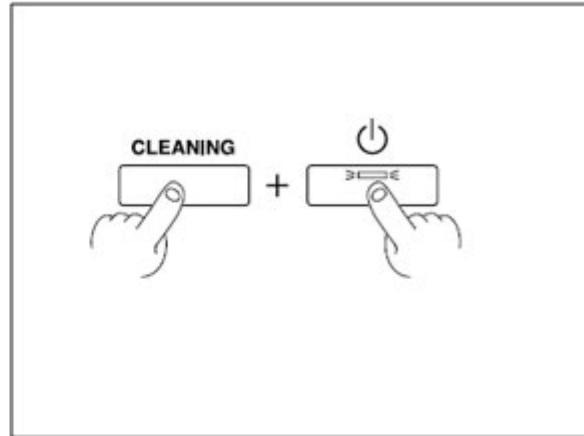


- 2 Select [WIPER REPLACE] and press the [ENTER] key. The head moves to the left side.

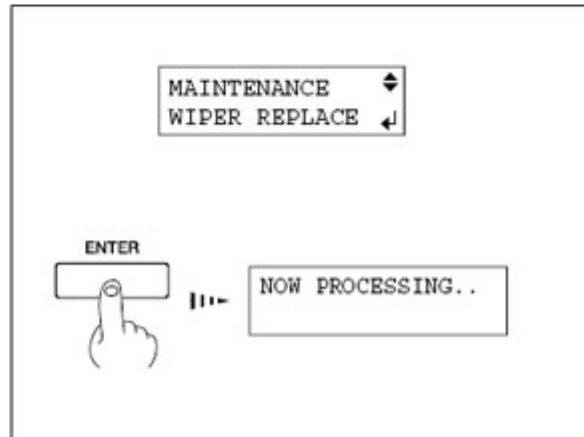

- 3 Make sure the screen shown in the figure is displayed. Then, remove the RIGHT I/S COVERS.

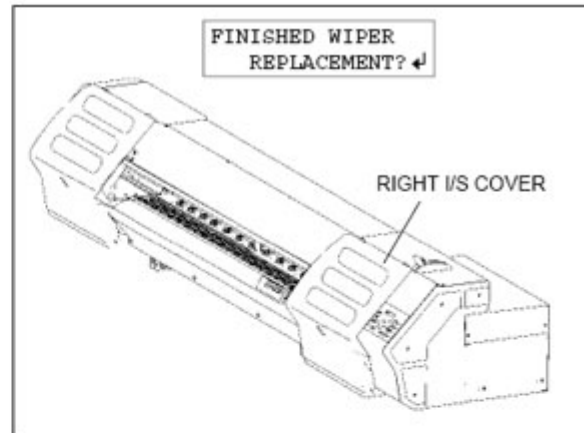


- 4 Using tweezers, grasp the bottom portion of the wiper and take it off the hook.

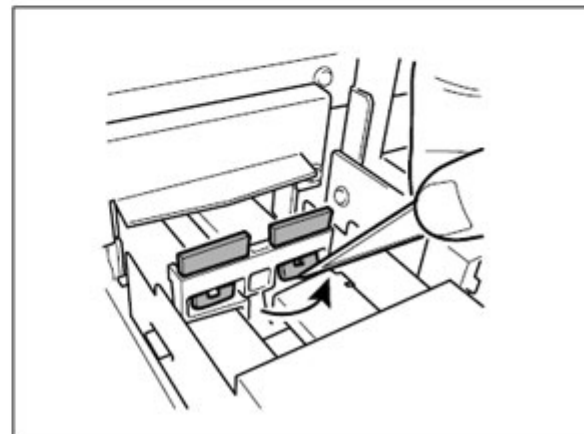

- 5** Remove the WIPER and install the new one.




Make sure to fix the wiper so that the rubber side faces the front.

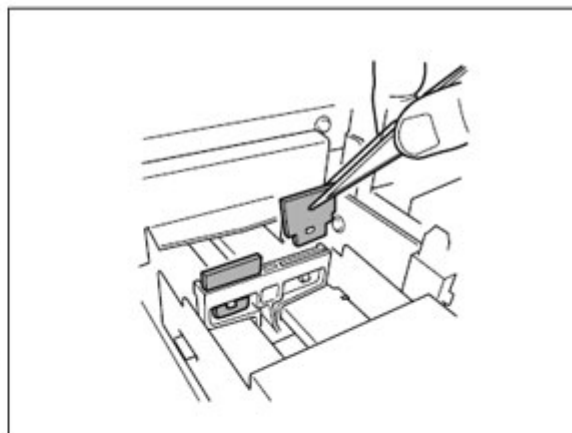


- 6** Use the tweezers to press the area shown in the figure and engage the WIPER on the hook.




Make sure to engage it on the hook. If the WIPER is not hooked, it may fall off during use.

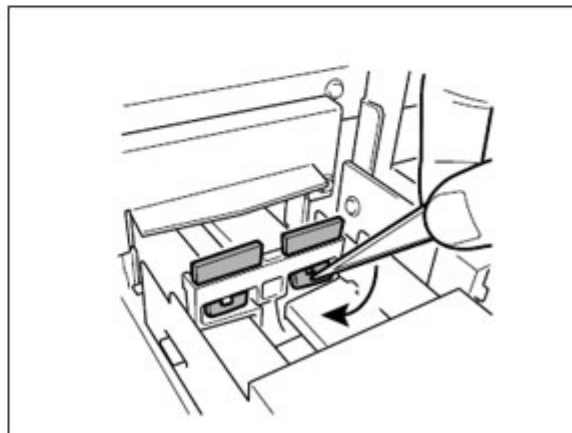

- 7** Fix the RIGHT I/S COVER and press the [ENTER] key. The head carriage moves back to the standby position and the head cleaning starts automatically. When the head cleaning finishes, the sub power will be turned off.

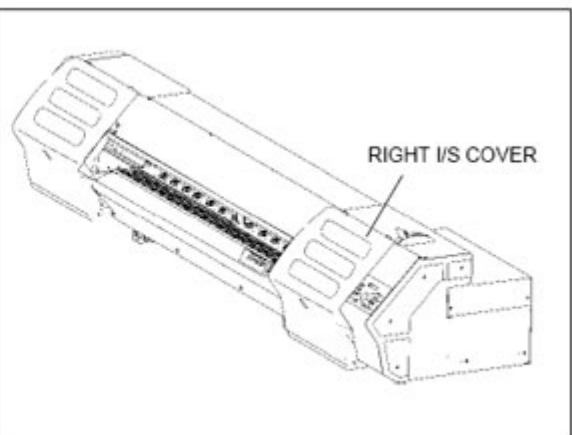

Application

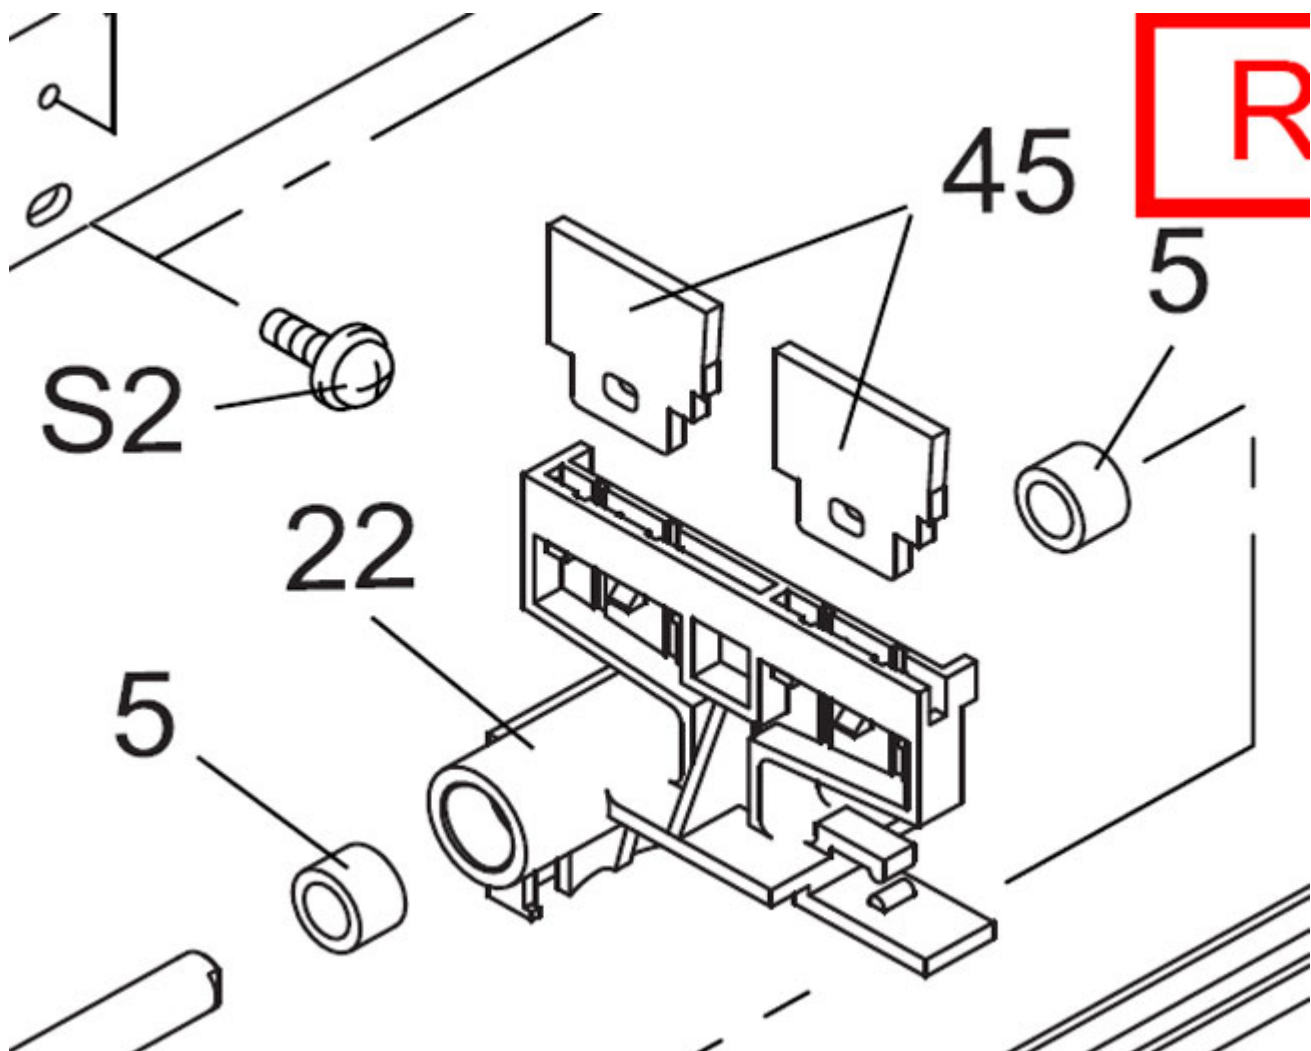

Tags

[Roland XC-540 Wiper Rubber](#)

QA

Q

Is the Roland XC-540 Wiper Rubber can be used on SP540V?

A

Yes, it is. It can be used on Roland XJ-640/XJ-740/XJ-1045EX/XJ-1000, Roland XC-540/XC-540W, Roland RS-640, Roland VP-300I/VP-540I

Reply by [sign-in-china](#)

Q

¿Can I use it on a Roland FP-740?

A

Dear Friend, Yes. Regards

Reply by [sign-in-china](#)



NETSUITE®
ONE SYSTEM. NO LIMITS.



Member
INTERNATIONAL
SIGN ASSOCIATION



Member
Specialty Graphic Imaging Association



ACCREDITED
BUSINESS

Copyright © 1999-2013 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email: info@sign-in-china.com Tel: +86 132 6410 3286 www.sign-in-china.com